



aluglass[®]

bautech

ISO 9001
certified by





MODULAR SCREEN SYSTEM

*FOR SCHOOLS OR ANY OTHER
SHARED DESKS APPLICATION!*



SQUARE DESKS | RECTANGULAR DESKS | ROUND DESKS

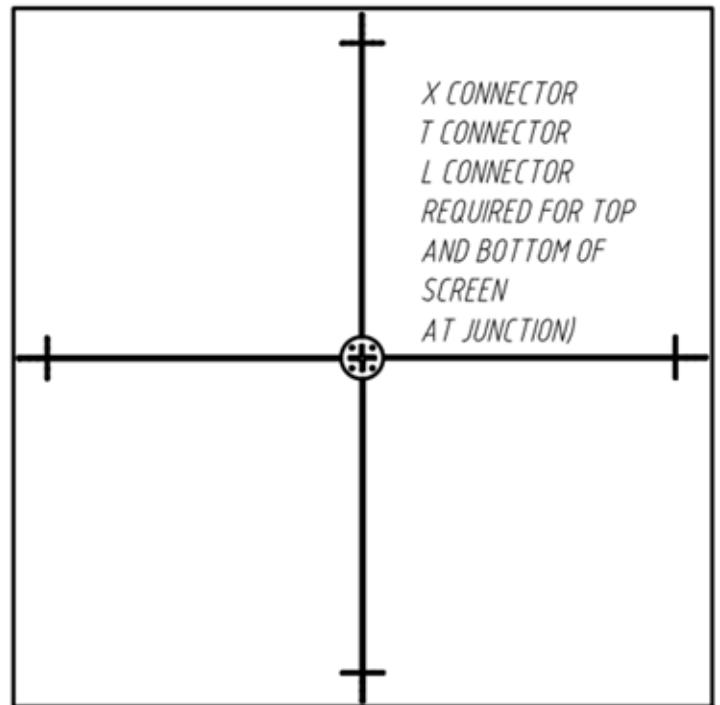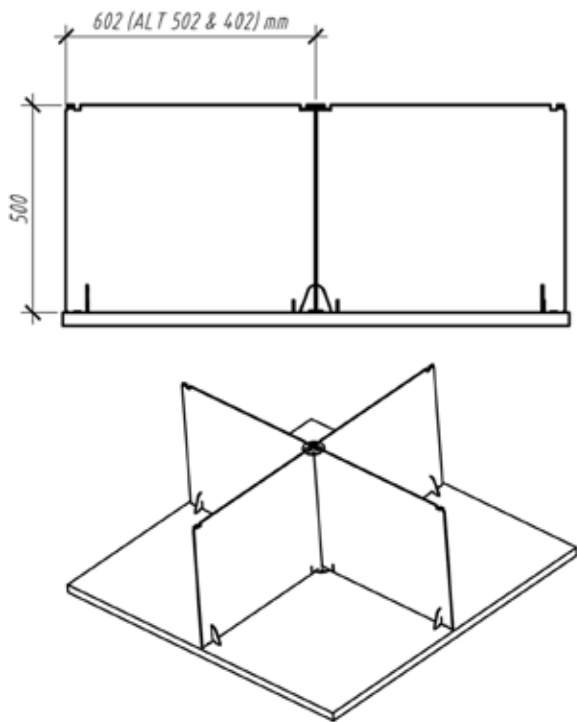

Modular configurations available


Standard single screens and L, T or X configurations

Screen height options: 500mm high for kids < 12 years

600mm high for adults

Screen width options: 400mm, 500mm or 600mm

Custom designs and configurations also available!

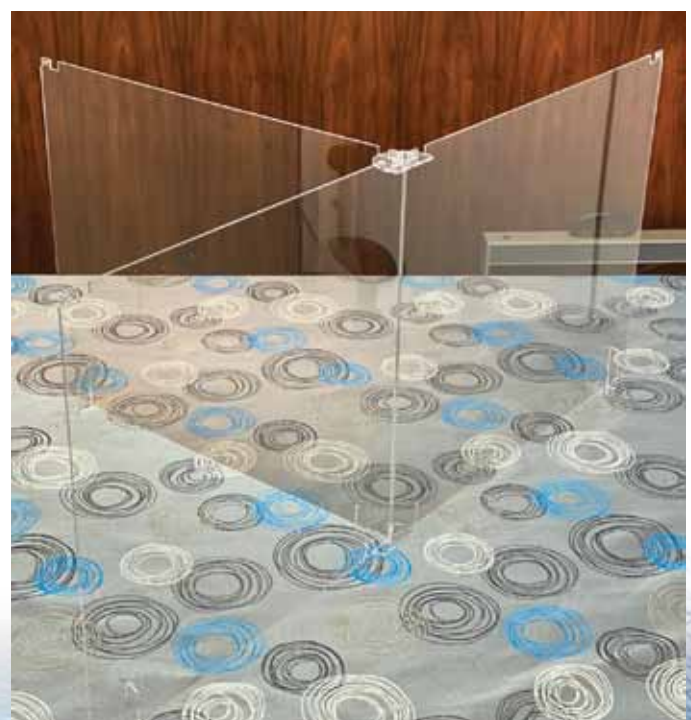


Visit www.aluglass.co.za for more information!


Tel: 011 451 8400

E-mail: abraham@aluglass.co.za


Simple desk set-up examples

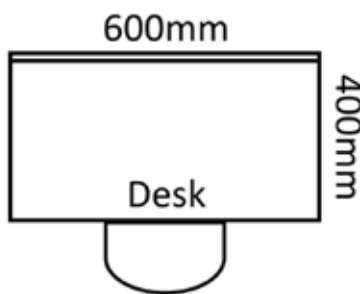


single desk front screen

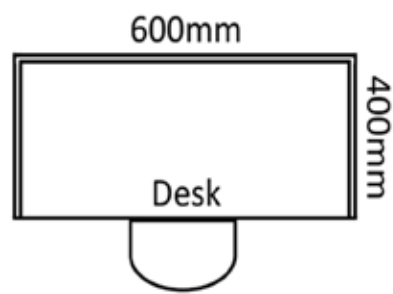


single desk front & sides screens 'box format'

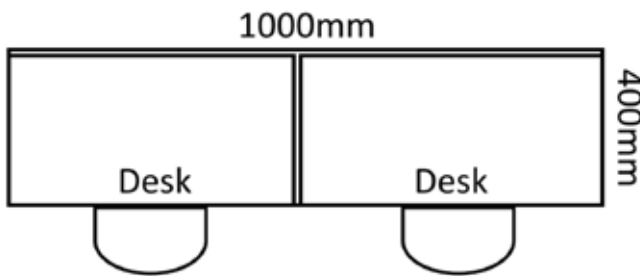


double desk front screens and separator screen

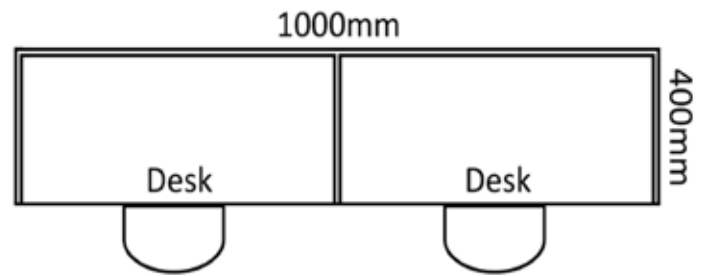


double desk front & sides screens 'box format'

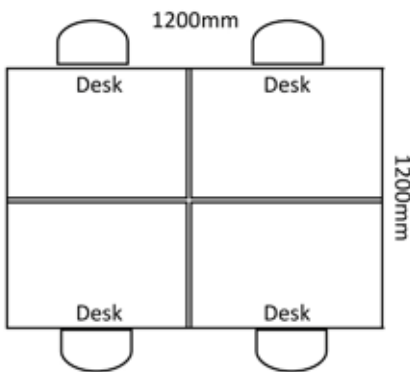

*rectangular 4seater desk
with X-configuration*



*round 4-seater desk
with X-configuration*

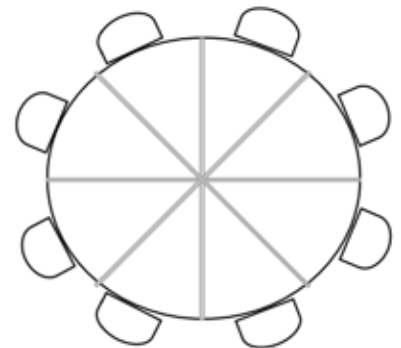

*round 8-seater desk
with 2 x X-configuration*

Applications include:
call centres, open plan offices, school desks, production facilities...



aluglass®

bautech

ISO 9001
certified by



Installation Instruction:

The VIRUS SCREEN comes with a high bond double sided adhesive tape on the underside of the plexi base. Use your isopropanol disinfectant spray or fluid to remove fat residue from the surface the base needs to adhere to. Use a paper towel to dry, pull tap tabs off and place screen firmly on substrate. Apply pressure to areas where tape is.

Tape adhesive cures for approx. 12 hrs until full bond strength is achieved. Alternatively, the screens can be screwed onto the desks for added stability.

Cleaning Instructions:

To clean plexiglass that has slight blemishes or dirt, start off by clearing away any debris. Then, use a premium micro-fibre cloth with soapy water to clean the entire surface area.

After wetting the cloth, be sure to lightly blot the surface, rather than applying pressure as you wipe. Too much pressure can actually cause scratches. After you have wiped the entire piece of acrylic, use the dry side of the cloth to dry or buff the area. Buffing or polishing the acrylic surface reduces future stains. If there are any remaining streaks, wet the cloth and dry again.

Choose Carefully: There are a couple of cleaning items that you'll want to stay away from. In fact, using the wrong cleaning product can completely damage your acrylic displays to the point that they become unusable!

Do not use paper towels, because they will not remove scratches, but may even cause them. Stick with micro-fibre type of cloth. Avoid ammonia based products, like Windex or other home glass cleaners, because they contain harmful chemicals that will actually damage the surface leaving it cloudy looking. Soapy water is the safest and most effective cleaning solution for acrylic.